
AC/DC Converter FA3-220SXXB9D4 Series



Typical Features

- Wide input voltage range:85-265VAC/120-380VDC
- ◆ No load power consumption≤0.4W
- Transfer efficiency (typ. 76%)
- Switching Frequency: 65KHz
- Protections: short circuit, over-current, over-voltage
- ♦ Isolation voltage:3000Vac
- ◆ Conform to IEC60950/UL60950/EN60950
- Ultra small bare board, industrial level design
- ◆ PCB mounting

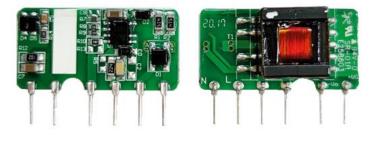

Application Field

FA3-220SXXB9D4 Series----- a compact size, high efficient, meet CE standard power module offered by Aipu. It features universal input voltage range, DC and AC dual-use, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, safer isolation. with good EMC performance, meet international EN55032, IEC/EN61000 standard. This series have very important application for power, industrial, instrument, smart home field. The application circuit in the datasheet is strongly recommended for harsh EMC environment.

Typical Product List

Certifi cate	Item No.	Output Specifications Power Voltage1 Current1 Voltage2 Current2				Max. Capaciti ve Load @220 Vac	Ripple& Noise 20MHz (Max)	Efficiency@ Full Load , 220Vac (Typical)	
		(W)	Vo1(V)	lo1(m A)	Vo2(V)	lo2(m A)	u F	mVp-p	%
-	FA3-220S3V3B9D4	2	3.3	600	-	-	700	80	69
-	FA3-220S05B9D4	3	5	600	-	-	680	80	72
-	FA3-220S09B9D4	3	9	333	-	-	200	100	73
-	FA3-220S12B9D4	3	12	250	-	-	470	120	73
-	FA3-220S12V6B9D4	3	12.6	238	-	-	200	120	76
-	FA3-220S15B9D4	3	15	200	-	-	200	120	76
-	FA3-220S24B9D4	3	24	125	-	-	68	120	77

Note 1: Due to space limitations, above is only a part of our product list, please contact our sales team for more items.

Note 2: The typical value of output efficiency is based on full load and burn-in after half an hour.

Note 3: "*" is model being developing.

Note 4: The fluctuation range of full load efficiency at table(%,TYP) is ±2%, full load efficiency = total output power/module's input power.

Note 5: Note: Ripple & Noise is tested by twisted pair method, for details please see(Ripple& Noise Test) at back.

Input Specifications									
ltem	Operating Condition	Min	Тур.	Мах	Unit				
Input Voltage Range	AC input	85	220	265	VAC				

Guangzhou Aipu Electron Technology Co., LtdAdd: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN.Email: market@aipu-elec.comTel: 86-20-84206763Fax: 86-20-84206762HOTLINE: 400-811-8032Website: http://www.aipulnion.com/Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation. Version: A/3Date: 2021-3-18Page 1 of 6



AC/DC Converter FA3-220SXXB9D4 Series



	DC input	120	310	380	VDC			
Input Frequency Range	-	47	50	63	Hz			
Input Current	115VAC	/	/	0.13	_			
input ourient	220VAC	/	1	0.07	A			
Surge Current	115VAC	/	/	11	~			
Surge Current	220VAC	/	/	21				
Leakage Current	-	0.25mA TYP/230VAC/50Hz						
External Fuse Recommended Value	-		1A-3A/250VAC s	slow-fusing				
Hot-plug	-		unavaila	ble				
Remote Control Terminal	-		unavaila	ble				
output Specifications								
ltem	Operating Condition	Min	Тур.	Мах	Unit			
Voltage Accuracy	Full input voltage range, any load	-	±2.0	±5.0	%			
Line Regulation	Nominal load	-	±1.0	±3.0	%			
Load Regulation	Nominal input voltage 20%~100% load	-	±1.0 ±5.0		%			
	Input 115VAC	-	-					
No Load Power Consumption	Input 220VAC	-	-	0.4	W			
	Single Output	15	-	-	%			
Minimum Load	Dual output Common Ground	-	-	-	%			
	Dual output Isolated	-	-	-				
Start-up Delay Time	Nominal input voltage (full load)	-	600	-	mS			
Power-off Holding Time	Input 115VAC (full load)		30		mS			
	Input 220VAC (full load)	-	70	-				
Dynamic Response	25%~50%~25%	Oversh	%					
	50%~75%~50%	Recov	mS					
Output Overshoot	Full input voltage		≤10%Vo		%			
Short Circuit Protection	range	Contin	Hiccup					
Temperature Coefficient	-	-	±0.03%	-	%/°C			
Over Current Protection Input 220Vac		≥130% lo self-recovery						

 Guangzhou Aipu Electron Technology Co., Ltd
 Add: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN.

 Email: market@aipu-elec.com
 Tel: 86-20-84206763
 Fax: 86-20-84206762
 HOTLINE: 400-811-8032
 Website: http://www.aipulnion.com/

 Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation. Version: A/3
 Date: 2021-3-18
 Page 2 of 6

AC/DC Converter FA3-220SXXB9D4 Series



*i*zo

ltem	Operating Condition	Min	Тур.	Мах	Unit			
Switching Frequency -		-	65	-	KHz			
Operating Temperature	-	-40	-	+85	°C			
Storage Temperature	-	-40	-	+85	°C			
Soldering Temperature	Wave-soldering	260±4°C, timing 5-10S						
	Manual-soldering	360±8°C, timing 4-7S						
Relative Humidity	-	10	-	90	%RH			
Isolation Voltage	Input-Output Test 1min, leakage current≤5mA	3000	-		VAC			
Insulation Resistor	Input-Output@ DC500V	100	-		MΩ			
Safety Standard	-	EN60950, IEC60950						
Vibration	-	10-55Hz,10G,30Min,alongX,Y,Z CLASSII MIL-HDBK-217F@25°C>300,000H						
Safety Class	-							
MTBF	-							
IC Characteristics								

Total Item		Sub Item	Test Standard	Class			
	EMI	CE	CISPR22/EN55032	CLASS B (recommend circuit see photo2)			
		RE	CLASS B (recommend circuit see photo2)				
	EMS	RS	IEC/EN61000-4-3	10V/m Perf.Criteria B (recommend circuit see photo1)			
		CS	IEC/EN61000-4-6	3Vr.m.s Perf.Criteria B(recommend circuit see photo1)			
EMC		ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV Perf.Criteria B			
		Surge	IEC/EN61000-4-5	±1KV Perf.Criteria B			
		EFT	IEC/EN61000-4-4	±2KV Perf.Criteria B			
		Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%~70% Perf.Criteria B			

 Guangzhou Aipu Electron Technology Co., Ltd
 Add: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN.


 Email: market@aipu-elec.com
 Tel: 86-20-84206763
 Fax: 86-20-84206762
 HOTLINE: 400-811-8032
 Website: http://www.aipulnion.com/

 Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation. Version: A/3
 Page 3 of 6

AC/DC Converter FA3-220SXXB9D4 Series

СЕ КоНЗ 🛞 🧭

Dimension

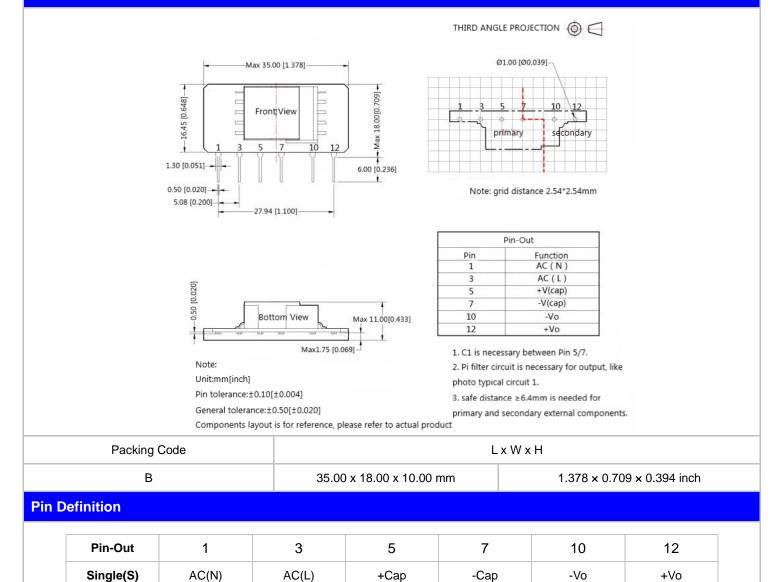


Note: If the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.

Ripple& Noise Test: (Twisted Pair Method 20MHZ bandwidth)

Test Method:

(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

(2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

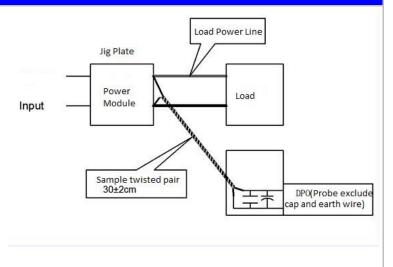


Guangzhou Aipu Electron Technology Co., LtdAdd: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN.Email: market@aipu-elec.comTel: 86-20-84206763Fax: 86-20-84206762HOTLINE: 400-811-8032Website: http://www.aipulnion.com/Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation. Version: A/3Date: 2021-3-18Page 4 of 6

AC/DC Converter FA3-220SXXB9D4 Series



Product Characteristic Curve

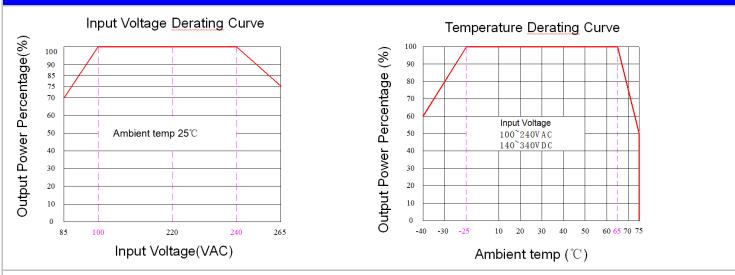

Note 1: Input Voltage should be derated based on Input voltage derating curve when it is 85~100VAC/240~265VAC/120~140VDC/ 340~380VDC:

Note 2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.

Typical Application Circuit and EMC Recommended Circuit

1. Typical Application Circuit

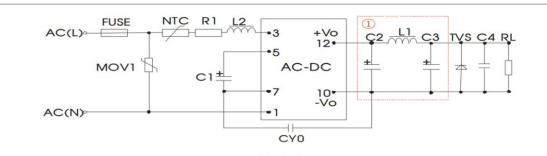


Photo 1

Note: ①as Pi filter circuit

Model	C1 (Requir ed)	C2 (Required)	L1	C3 (Required)	C4	L2	NTC	CY0	FUSE (Required)	TVS tube
FA3-220S3V3B9D4	10uF /400V	470uF/ 16V	4.7	220uF/16V						SMBJ7.0A
FA3-220S05B9D4		470uF/ 16V	uH	220UF/16V	0.1uF	4.7mH 5D-9				SIVIDJ7.UA
FA3-220S09B9D4		330uF/ 16V		330uF/16V						SMBJ15A
FA3-220S12B9D4		330uF/ 16V	'	330uF/16V			0-9 104M/ 400V	3.15A/ 250V	SMBJ15A	
FA3-220S12V6B9D4		330uF/ 16V	2.0 uH	330uF/16V	,				2001	SMBJ15A
FA3-220S15B9D4		220uF/ 25V	ull	220uF/25V						SMBJ20A
FA3-220S24B9D4		100uF/ 35V		47uF/35V						SMBJ30A

Note:

1. C1 : AC input, C1 is input filter electrolytic capacitor(which is required), recommend value 10uF/400V.


DC input, C1 is a big filtering capacitor in EMC filter(which is required), recommend value 10uF/400V.

2. R1: current-limit resistor, recommended 12Ω , 5W.

Guangzhou Aipu Electron Technology Co., LtdAdd: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN.Email: market@aipu-elec.comTel: 86-20-84206763Fax: 86-20-84206762HOTLINE: 400-811-8032Website: http://www.aipulnion.com/Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation. Version: A/3Date: 2021-3-18Page 5 of 6



CE RoHS

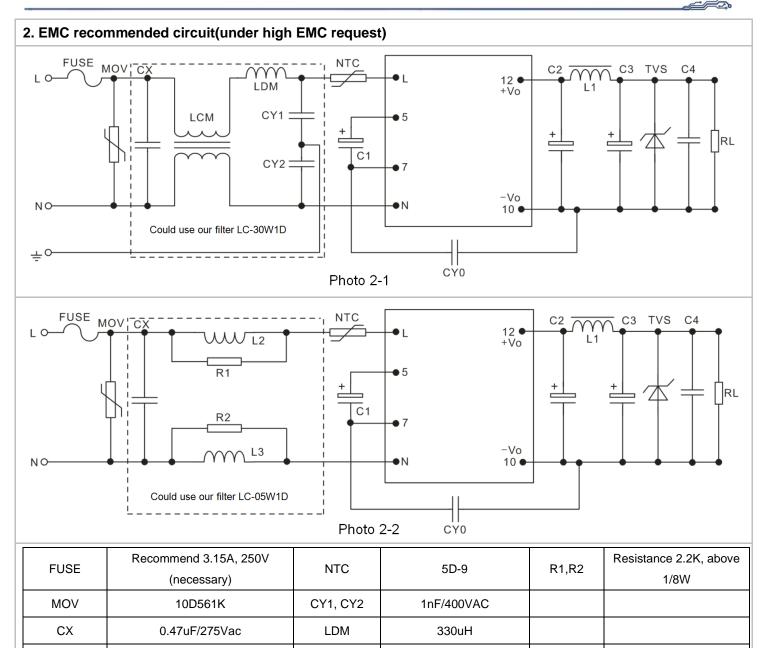

Note:

LCM

1. The product should be used within the specification range, or it will cause permanent damage to it;

2. The input terminal should connect to fuse;

50mH min

3. If the product is operated under the minimum requested load, the product performance cannot be guaranteed to comply with all parameters in the datasheet;

L2, L3

4. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;

5. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% with nominal input voltage and rated output load(pure resistance load);

Color ring 1mH, 1W

6. All index testing methods in this datasheet are based on our Company's corporate standards;

7. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;

8. We can provide product customization service,

9. Specifications are subject to change without prior notice, please follow our website for newest manual.