

Conform to CE

Typical Features

- ◆ Wide input voltage range: 2:1
- ◆ High efficiency up to 93%
- ◆ Low no-load power consumption
- ◆ Operating Temperature: -40°C to +85°C
- ◆ High isolation voltage, input-output 1500VDC
- ◆ Protection: Input under voltage, output over voltage, short circuit, over current, over temp
- ◆ Standard 1/8 brick

ZDD120-48S12, high-performance power supply designed for the communication field, rated input voltage 48VDC, output 12V/120W, no minimum load requirement, wide voltage input 36-75VDC, regulated single output. It has the function of input undervoltage, output overcurrent, overvoltage, overtemperature, short circuit protection, remote control and remote compensation, output voltage regulation, etc.

Typical Product List

| Part No | Range (VDC) | Output Power (W) | Output Voltage (VDC) | Output Current (A) | Ripple & Noise (mV) | Full load efficiency (%) Min/Typ. | Note |
|---------------|-------------|------------------|----------------------|--------------------|---------------------|-----------------------------------|-------------------------|
| ZDD120-48S12C | 36-75 | 120 | 12 | 10 | 120 | 91/93 | Standard positive logic |
| ZDD120-48S12N | | | | | | | Standard negative logic |

Input Specification

| Item | Operating conditions | Min. | Typ. | Max. | Unit |
|----------------------------------|--|------|------|------|-----------------------|
| Max input current | 36V Input voltage, full load output | -- | -- | 3.8 | A |
| No load input current | Rated input voltage | -- | -- | 150 | mA |
| Input surge voltage (1sec. max.) | Inputs above this range may cause permanent damage | -0.7 | -- | 100 | VDC |
| Start up voltage | | -- | -- | 35 | |
| Input under voltage protection | No-load test, full-load test will have overcurrent protection in advance | 32 | -- | 34 | |
| Control Pin(CNT) | Positive logic: CNT is suspended or connected to 3.5-15V to turn on, connected to 0-1.2V to turn off | | | | Reference voltage-VIN |
| | Negative logic: CNT is suspended or connected to 3.5-15V to turn off, connected to 0-1.2V to turn on | | | | |

Output Specification

| Item | Working conditions | Min. | Typ. | Max. | Unit |
|----------------------------------|---|-------|------|-------|-------|
| Output Voltage Accuracy | Nominal input voltage, 0%-100% load | -- | ±0.2 | ±0.5 | % |
| Line Regulation | Full load, input voltage from low to high | -- | ±0.1 | ±0.2 | |
| Load Regulation | Nominal input voltage, 10%-100% load | -- | ±0.1 | ±0.2 | |
| Transient recovery time | 25% load step change (step rate 1A/50uS) | -- | 200 | 250 | uS |
| Transient Response Deviation | | -5 | -- | 5 | % |
| Temperature Drift Coefficient | Full load | -0.02 | -- | +0.02 | %/°C |
| Ripple & Noise | 20M bandwidth, external capacitor above 220uF | -- | 100 | 120 | mVp-p |
| Output voltage adjustment (TRIM) | | -20 | -- | +10 | % |

| | | | | | |
|--|---|-----------------------------------|-----|-----|----|
| Output voltage remote compensation (Sense) | | -- | -- | 105 | % |
| Over temp protection | Product internal temperature detection resistance temperature | 105 | 115 | 125 | °C |
| Output overvoltage protection | | 125 | -- | 150 | % |
| Output overcurrent protection | | 11 | -- | 17 | A |
| Output short circuit protection | | Hiccup, continuous, self-recovery | | | |

General Specification

| Item | Working conditions | Min. | Typ. | Max. | Unit |
|-----------------------|--|------|------|------|---------|
| Isolation Voltage | I/P-O/P Test 1min, leakage current < 3mA | 1500 | -- | -- | VDC |
| Insulation resistance | I/P-O/P Insulation voltage 500VDC | 100 | -- | -- | MΩ |
| Switching frequency | | 290 | 280 | 310 | KHz |
| MTBF | | 150 | -- | -- | K hours |

Environmental Characteristics

| Item | Operating conditions | Min. | Typ. | Max. | Unit |
|------------------------------|---|-----------------------------|------|------|------|
| Operating Temperature | See temperature derating curve | -40 | -- | +85 | ℃ |
| Storage Humidity | No condensing | 5 | -- | 95 | %RH |
| Storage Temperature | | -40 | -- | +125 | ℃ |
| Soldering resistance of pins | The solder joint is 1.5mm away from the shell, and the soldering time< 1.5S | -- | -- | +350 | |
| Cooling requirements | | EN60068-2-1 | | | |
| Dry heat requirement | | EN60068-2-2 | | | |
| Damp heat requirement | | EN60068-2-30 | | | |
| Shock and vibration | | IEC/EN 61373 Body 1 Class B | | | |

EMC characteristics (EN50155)

| | | | | |
|-----|-------|-------------|---------------------------------|------------------|
| EMI | CE | EN50121-3-2 | 150kHz-500kHz 79dBuV | |
| | | EN55016-2-1 | 500kHz-30MHz 73dBuV | |
| | RE | EN50121-3-2 | 30MHz-230MHz 40dBuV/m at 10m | |
| | | EN55016-2-1 | 230MHz-1GHz 47dBuV/m at 10m | |
| EMS | ESD | EN50121-3-2 | Contact ±6KV/Air ±8KV | perf. Criteria A |
| | RS | EN50121-3-2 | 10V/m | perf. Criteria A |
| | EFT | EN50121-3-2 | ±2kV 5/50ns 5kHz | perf. Criteria A |
| | Surge | EN50121-3-2 | line to line ± 1KV (42Ω, 0.5μF) | perf. Criteria A |
| | CE | EN50121-3-2 | 0.15MHz-80MHz 10 Vr.m.s | perf. Criteria A |

Physical Characteristics



| | |
|------------------|--|
| Dimension | 58.1*23.0*12.5mm, Aluminum alloy material, anodized aluminum color |
| Product Weight | Standard xxg |
| Cooling method H | Conduction cooling or forced air cooling |

Dimension


Unit: mm

Dimension: 58.1mm*23.0mm*12.5mm

first angle projection

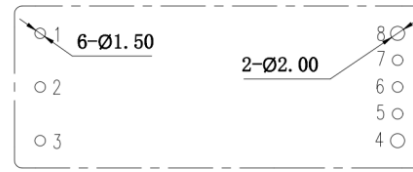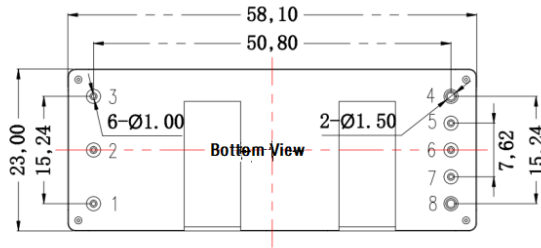

Recommended PCB Slot Size

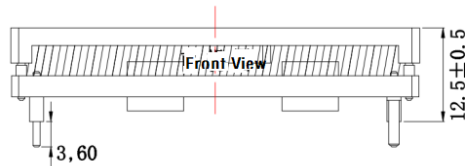

Note:

Unit:mm




1,2,3,5,6,7 pin diameter:1.00

4,8 pin diameter:1.50

general tolerance:±0.10

| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|---------|------|-----|------|------|----|------|----|------|
| Pin-Out | Vin+ | CNT | Vin- | OUT- | -S | TRIM | +S | OUT+ |

Product Characteristic Curve

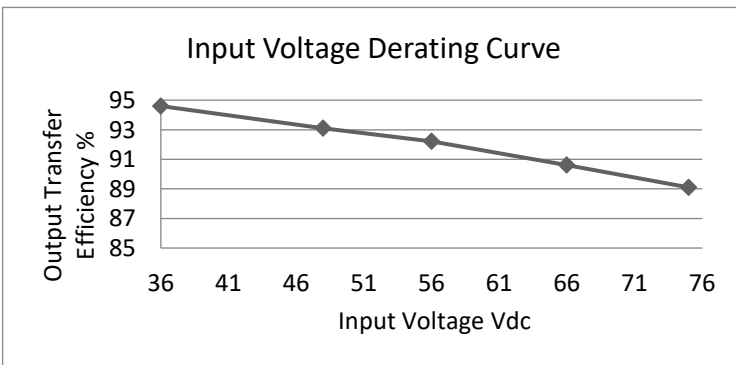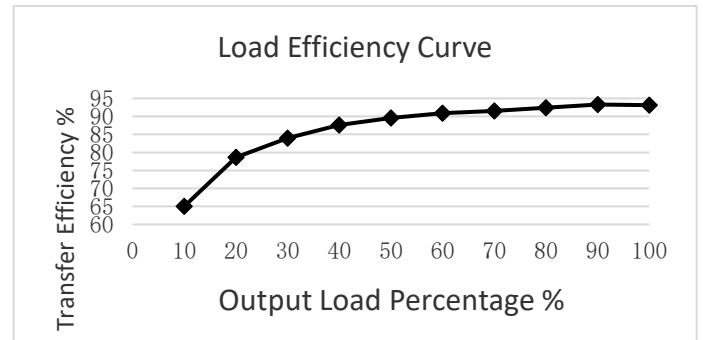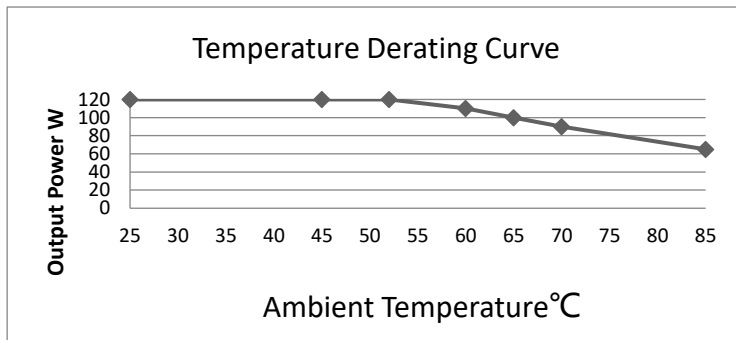

Note:


1. Both the temperature derating curve and the efficiency curve are tested with typical values;

2. The temperature derating curve is tested according to our laboratory test conditions. If the actual environmental conditions used by customers are inconsistent, it is necessary to ensure that the temperature of the aluminum casing of the product does not exceed 100 °C, and it can be used within any rated load range.

Design Reference

1. Ripple & Noise


All DC/DC converters of this series are tested according to the test circuit recommended in the following figure before leaving the factory.

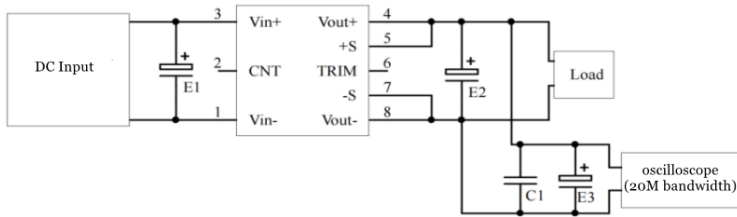

| <div>capacitor value</div> <div>Output voltage</div> | E1 (μF) | E2 (μF) | C1 (μF) | E3 (μF) |
|--|---------|---------|---------|---------|
| 3.3VDC | 100 | 1000 | 1 | 10 |
| 5VDC | | 680 | | |
| 12VDC | | 220 | | |
| | | | | |
| 48VDC | 68 | 68 | | |
| | | | | |
| 110VDC | | | | |


2. Recommended application circuit

If customer does not use the circuit recommended by our company, please be sure to connect an electrolytic capacitor of at least 100 μF in parallel at the input end to suppress the possible surge voltage at the input end

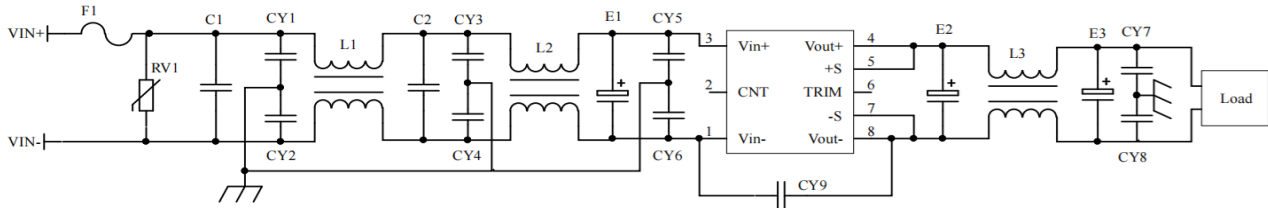


| | |
|-------------------------|---|
| F1 | T5A/250V fusing |
| RV1 | 14D 100V Varistor |
| C1,C2 | 105/100V Polyester Film Capacitor |
| CY1,CY2,CY3,CY4,CY5,CY6 | 472/250Vac safety Y2 capacitor |
| CY7,CY8 | 103/2KV Ceramic Capacitor |
| CY9 | 471/250Vac Safety Y1 capacitor |
| E1 | 100μF/100V Electrolytic Capacitor |
| E2, E3 | 220μF/16V Electrolytic Capacitor |
| L1,L2 | inductance is greater than 10mH, and the overcurrent 5A temperature rise is less than 25℃ |
| L3 | inductance is greater than 1mH, and the overcurrent 15A temperature rise is less than 25℃ |

3. Remote control terminal (CNT) control method application recommendation

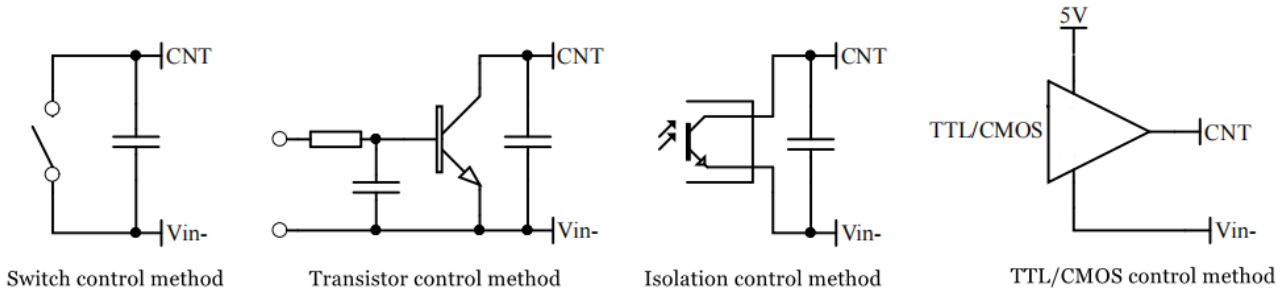

4. Sense usage and precautions


(1) Without far-end compensation:

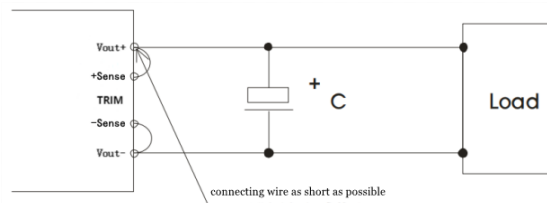

Precautions:

- Do not use remote compensation, make sure Vout+ and Sense+, Vout- and Sense- are short-circuited;
- The connection between Vout+ and Sense+, Vout- and Sense- should be as short as possible and close to the pins, otherwise the module may become unstable.

(2) Using remote compensation

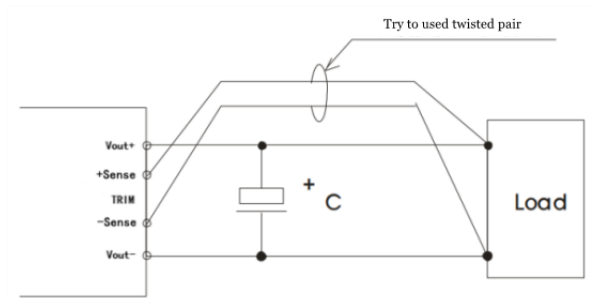


Precautions:

1. When the long-end compensation lead is used, the output voltage may be unstable;
2. If remote compensation is used, please use twisted pair or shielded wire, and keep the lead wire as short as possible;
3. Please use wide PCB leads or thick wires between the power module and the load, and keep the line voltage drop below 0.3V to ensure that the power output voltage remains within the specified range;
4. The impedance of the leads may cause the output voltage to oscillate or have larger ripples. Please verify it before use.


5. Use of TRIM and calculation of TRIM resistance

The relationship between output change voltage ΔU and resistance is as follows:



Voltage up regulation: add resistor Rup between Trim and output negative

$$R_{up} = 50 / \Delta U - 5.1 \text{ (K}\Omega\text{)}$$



Voltage Down: Add resistor Rdown between Trim and output positive

$$R_{down} = 5.17 * (9.5 - \Delta U) / \Delta U - 5.1 \text{ (K}\Omega\text{)}$$

6. This product does not support the use of direct parallel connection to increase the power. If you need to use it in parallel, please consult our technical staff.

Others

- 1 The warranty period of this product is two years. During the normal damage, it will be repaired free of charge. Damages caused by errors in the use method or manufacturing technology, a paid service is provided.
2. Our company can provide product customization and matching filter modules. For details, please contact our technical staff directly.