



Typical Features

- ◆ Wide range input: 200-1500VDC
- ◆ No-load power consumption $\leq 0.15W$
- ◆ No load input current as low as 1.0mA
- ◆ Conversion efficiency (typically 81%)
- ◆ Switching frequency: 65KHz
- ◆ Isolation voltage: 4000VAC
- ◆ Operating Temperature: $-30^{\circ}C \sim +70^{\circ}C$
- ◆ Comply with CE and RoHS certification standards



Application Field

BK40-850SXXG2N6 series -- It is a special high-voltage power supply designed and developed by Aipu for customers specifically for coal mine electrical customers, with regard to equipment power supply safety, convenient installation, reliable application, technological innovation and other development requirements. This series of power supplies have the advantages of global input voltage range, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, and high safety isolation.

Typical Product List

Model	Power (W)	Output Voltage/Current				Max. Capacitive Load (u F)	Ripple and noise 20MHz (mVp-p)	Efficient @800VDC (TYP.) (%)
		Voltage 1	Current1	Voltage2	Current2			
		Vo1 (V)	Io1 (mA)	Vo2 (V)	Io2 (mA)			
BK40-850S24G2N6	40	24	1667	-	-	1000	100	81
*BK40-850S28G2N6		28	1428	-	-	800	100	82
*BK40-850S35G2N6		35	1150	-	-	600	100	84
*BK40-850S37G2N6		37	1081	-	-	400	100	85

Note 1: Due to space limitations, above is only a part of our product list, please contact our sales team for more items.

Note 2: "*" is model under developing.

Note 3: The typical output efficiency is based on that product is full loaded and burned-in after half an hour.

Note 4: The fluctuation range of full load efficiency(% ,TYP) is $\pm 2\%$, full load output efficiency= total output power/module's input power.

Note 5: The test method of ripple and noise adopts twisted pair test method. Please refer to the following for specific test method and configuration (instructions of ripple & noise test).

Input Specification

Item	Operating Condition	Min.	Typ.	Max.	Unit
Input Voltage Range	DC input	200	800	1500	VDC
Item	Operating Condition	Min.	Typ.	Max.	Unit
Input Current	200VDC	/	/	0.2	A
	800VDC	/	/	0.07	
Inrush current	200VDC	/	/	180	
	800VDC	/	/		
Hot swap	-	not support			
Remote	--	No remote control terminal			
Recommended value of external fuse		2A/1000VAC, must be connected			

Output Specification

Item	Operating Condition	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Input full voltage range for any load	--	±2.0	±3.0	%
Linear adjustment rate	Nominal load	-	--	±0.5	
Load regulation rate	Input nominal voltage 10%~100% load	--	-	±1.0	
No-load power consumption	Input 200VDC	--	--	0.15	W
	Input 1500VDC	--	--		
Minimum load	Single output	0	-	-	%
Turn-on delay time	Input nominal voltage (full load)	--	1000	--	mS
Power off Holding time	1200VDC	--	100	--	mS
	1500VDC	-	150	-	
Dynamic Response Overshoot Range	25%-50%-25% 50%-75%-50%	Overshoot range (%): ≤±5.0		%	
		Recovery time (mS): ≤5.0		mS	
Output overshoot		≤10%Vo		%	
Short circuit protection	Input full voltage range	Self-recovery after the short circuit is removed		Interval	
Drift coefficient	-	-	±0.03%	-	%/°C
Overcurrent protection	Input 800VDC	≥150% Io self-recovery		Interval	
Overvoltage protection	Input 24VDC	≤30		VDC	
	Input 28VDC	≤35		VDC	
	Input 35VDC	≤45		VDC	
	Input 37VDC	≤45		VDC	


General Specification

Item	Operating Condition	Min.	Typ.	Max.	Unit
Isolation Voltage	Input to output≤5.0mA/1Min	4000	--	--	VDC
Insulation resistance	Input to output: 500VDC	50	-	-	MΩ
Operating Temperature	--	-40	--	+70	℃
Storage Temperature	--	-40	--	+85	
Soldering Temperature	Wave-soldering	260±4℃, time: 5-10S			
	Manual-welding	360±8℃, time: 4-10S			
Relative humidity	-	10	-	90	%RH
Switching Frequency	--	--	65	-	KHz
Max. Case Temperature	Within operating Curve	--	--	+100	℃
Vibrate	-	10-55Hz,10G,30Min,alongX,Y,Z			
Security level	-	CLASSI			
Trouble-free time	-	MIL-HDBK-217F@25℃ > 300,000H			

Physical Specifications


Total project	Subproject	Testing standard	
EMS	Electrostatic discharge	IEC/EN61000-4-2	Contact ±6KV Perf.Criteria B
	Radiation immunity	IEC/EN61000-4-3	10V/m Perf.Criteria A
	Surge immunity	IEC/EN61000-4-5	±2KV Perf.Criteria B
	Pulse group immunity	IEC/EN61000-4-4	±4KV Perf.Criteria B
	Conducted disturbance immunity	IEC/EN61000-4-4	±4KV Perf.Criteria B

Typical Application Circuit


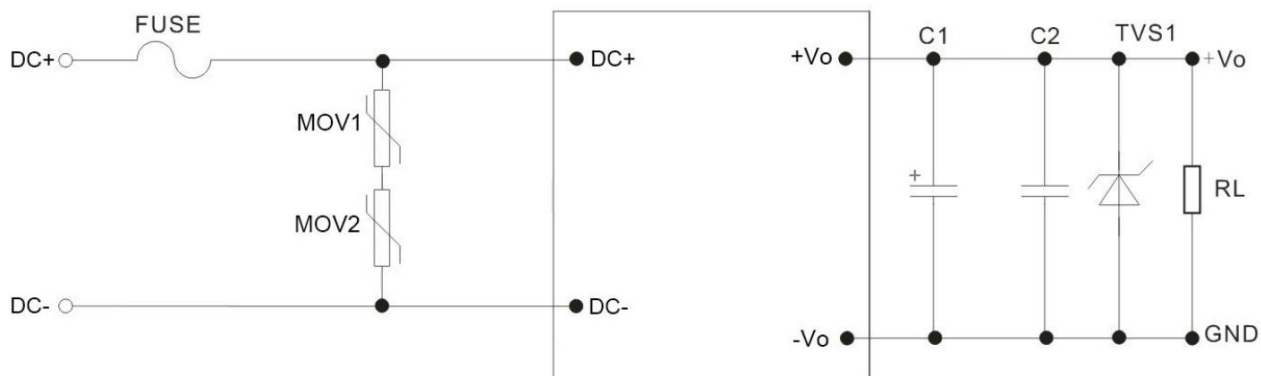


Device Tag	Device name	Recommended device value
FUSE	fuse	2A/1000VAC, must be connected
MOV1,MOV2	Varistor	14D152K
C1	High frequency electrolytic capacitor	10uF/50V
C2	Ceramic capacitors	1uF/50V

EMC External Recommended Circuit

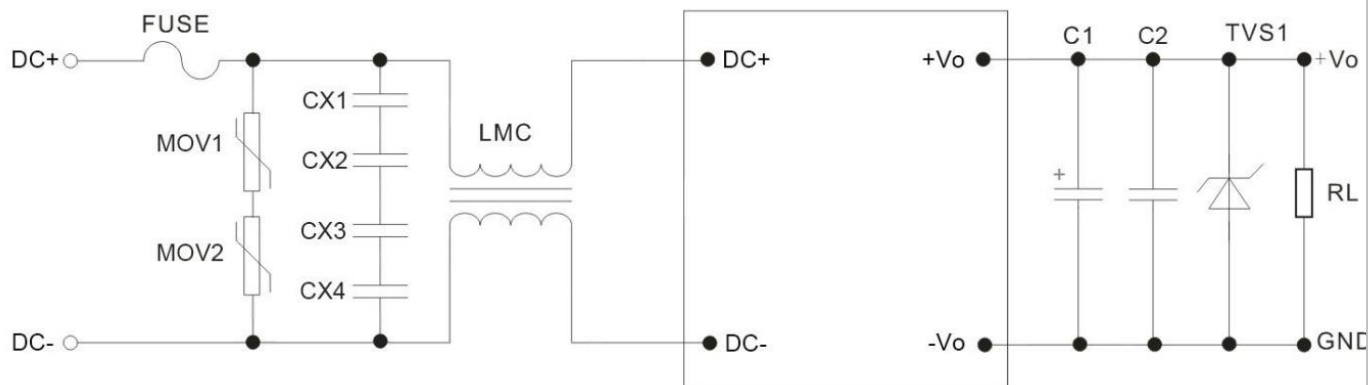

第三角投影 

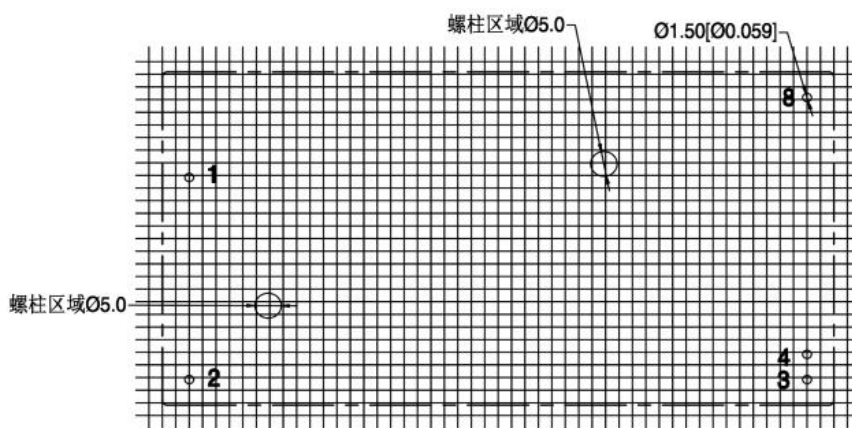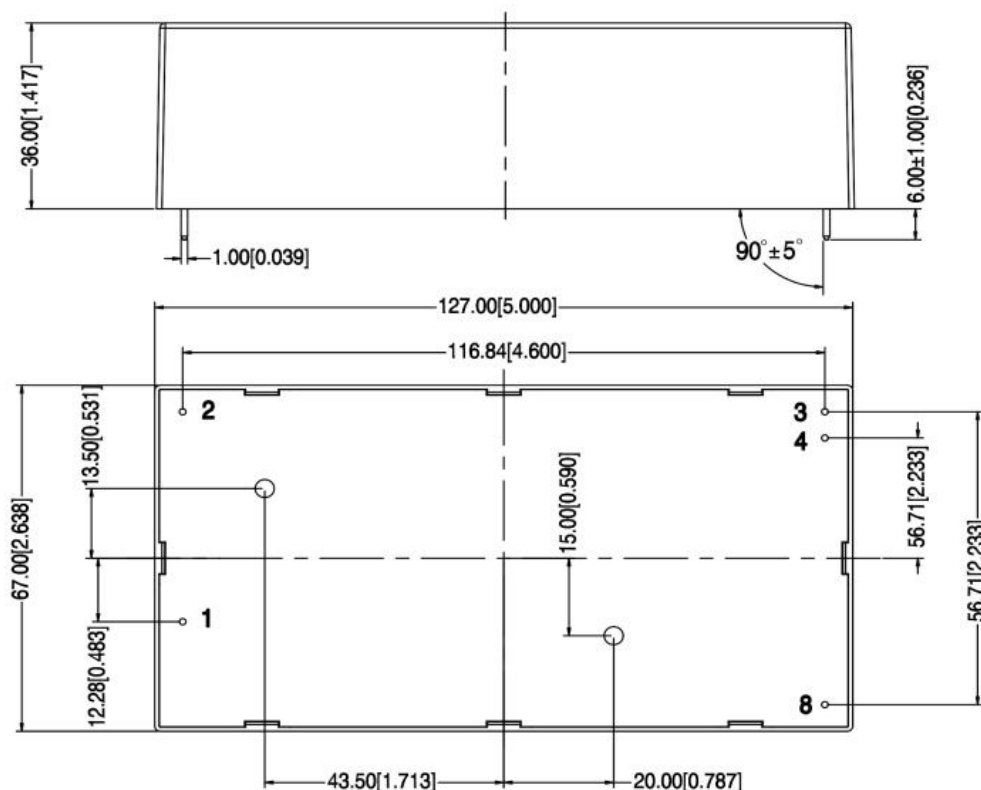

注：栅格距离2.54*2.54mm
 尺寸单位：mm[inch]
 端子直径公差：±0.10mm[±0.004inch]
 未标注之公差：±1.00mm[±0.039inch]
 该产品在振动比较恶劣的环境下必须增加M3螺丝固定
 固定孔尺寸参照外观尺寸图

Pin-out	1	2	3	4	8
Single (S)	-Vin	+Vin	+Vo	-Vo	NC

Dimension


Packing code	L x W x H	
-	127.0X67.0X36.0mm	5.000X2.638X1.417inch

Ripple & Noise Test: (Twisted Pair Method 20MHZ bandwidth)

Test Method:


(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

(2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

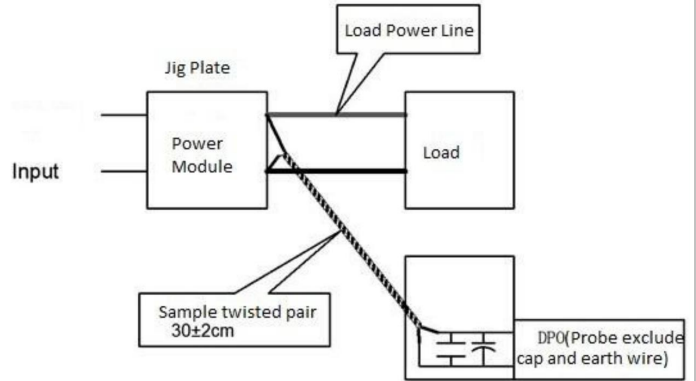


Product Characteristic Curve

Temperature Derating Curve

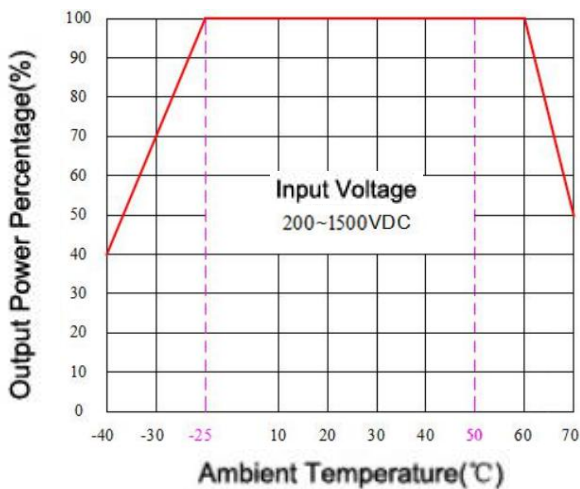

Input Voltage Derating Curve

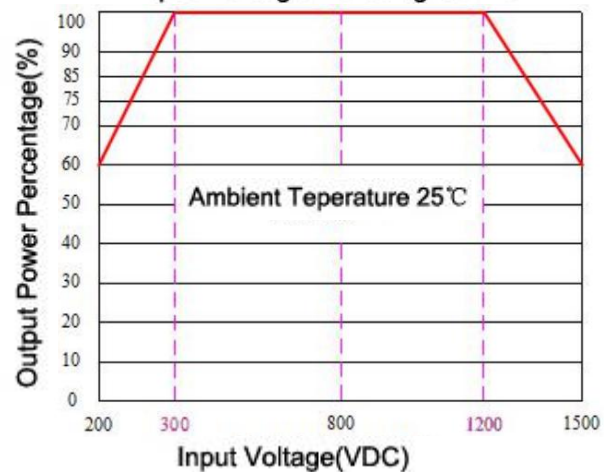

- 1: The input voltage is 200~300VDC/1200~1500VDC, and it needs to be used for voltage derating on the basis of the input voltage derating curve.
- 2: This product is suitable for use in a natural air cooling environment. If it is used in a closed environment, please contact our company.

Note:

- 1.The product should be used under the specification range, otherwise it will cause permanent damage to it.
- 2.Product's input terminal should connect to fuse;
- 3.If the product operated below the minimum load request, we cannot ensure that the performance of product is in accordance with all the indexes in this manual;
- 4.If the product worked beyond the load range, we cannot ensure that the performance of product is in accordance with all the indexes in this manual;
- 5.Unless otherwise specified, data in this datasheet are tested under conditions of $T_a=25^{\circ}\text{C}$, humidity<75% when inputting nominal voltage and outputting rated load(pure resistance load);
- 6.All index testing methods in this datasheet are based on our Company's corporate standards.
- 7.The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
- 8.We can provide customized product service;
- 9.The product specification may be changed at any time without prior notice.