


DESIGNING A SAFER CITY PUBLIC VIDEO SURVEILLANCE SOLUTION

Public Video Surveillance Solution:

- Industrial grade design for outdoor use in harsh environments
- Max 120km distance of fiber transmission
- Rich network management, separate devices with different business-type in LAN
- Rational allocation of bandwidth, guarantee the video fluent
- Easy installation and maintenance, convenient to expand

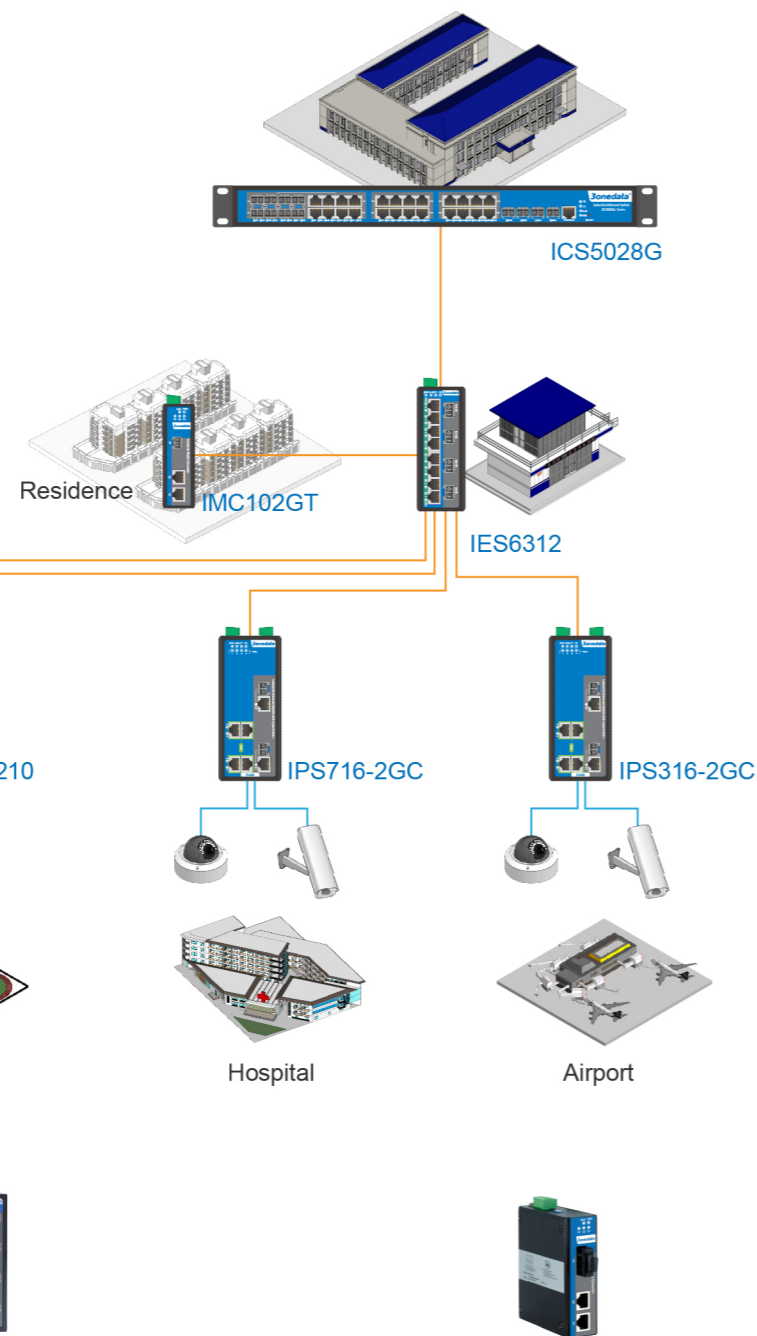

ICS5028G-4XGS-8GC

28-port Gigabit/10 Gigabit L3 Switch

- SW-Ring technology, automatic recovery time < 20ms
- Support ERPS, RSTP/STP, and MSTP protocols
- DDM (Digital Diagnostic Monitoring) function
- 16KBytes jumbo frame
- Dual redundant power supply
- -40~75°C wide operating temperature

IES6312 Series

12-port Full Gigabit Managed Switch

- SW-Ring technology, automatic recovery time < 20ms
- DDM (Digital Diagnostic Monitoring) function
- 16KBytes jumbo frame improves data transmission efficiency
- Support Radius, SNMPv3, 802.1X HTTPS and SSH configuration
- Dual redundant power supply
- -40~75°C wide operating temperature

IMC102GT Series

3-port Full Gigabit Media Converter

- Jumbo frame function & LFP function
- Single non-polar DC power supply
- -40~75°C wide operating temperature

UP TO
14KM

3onedata Co., Ltd.

Add: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Songbai Road, Nanshan District, Shenzhen, 518105, China

Tel: +86-755-26702688 Email: ics@3onedata.com

Copyright © 2020 3onedata Co., Ltd. All Rights Reserved.



Follow us on LinkedIn