

- IES6300**  
**12-port Full Gigabit L2 Managed PoE Switch**
- SW-Ring, automatic recovery time < 20ms
  - DDM for network diagnosis and troubleshooting
  - GVRP function can dynamically creat and manage VLAN
  - -40~75°C wide operating temperature




- IES6312**  
**12-port Full Gigabit L2 Managed PoE Switch**
- SW-Ring, automatic recovery time < 20ms
  - DDM for network diagnosis and troubleshooting
  - GVRP function can dynamically creat and manage VLAN
  - -40~75°C wide operating temperature



- ICS5028G**  
**28-port 10G L3 Managed Switch**
- SW-Ring, automatic recovery time < 20ms
  - DDM for network diagnosis and troubleshooting
  - 16KBytes jumbo frame improves data transmission efficiency
  - -40~75°C wide operating temperature



- IES3000**  
**12-port Full Gigabit Managed Bypass PoE Switch**
- SW-Ring, automatic recovery time < 20ms
  - DDM for network diagnosis and troubleshooting
  - GVRP function can dynamically creat and manage VLAN
  - -40~75°C wide operating temperature

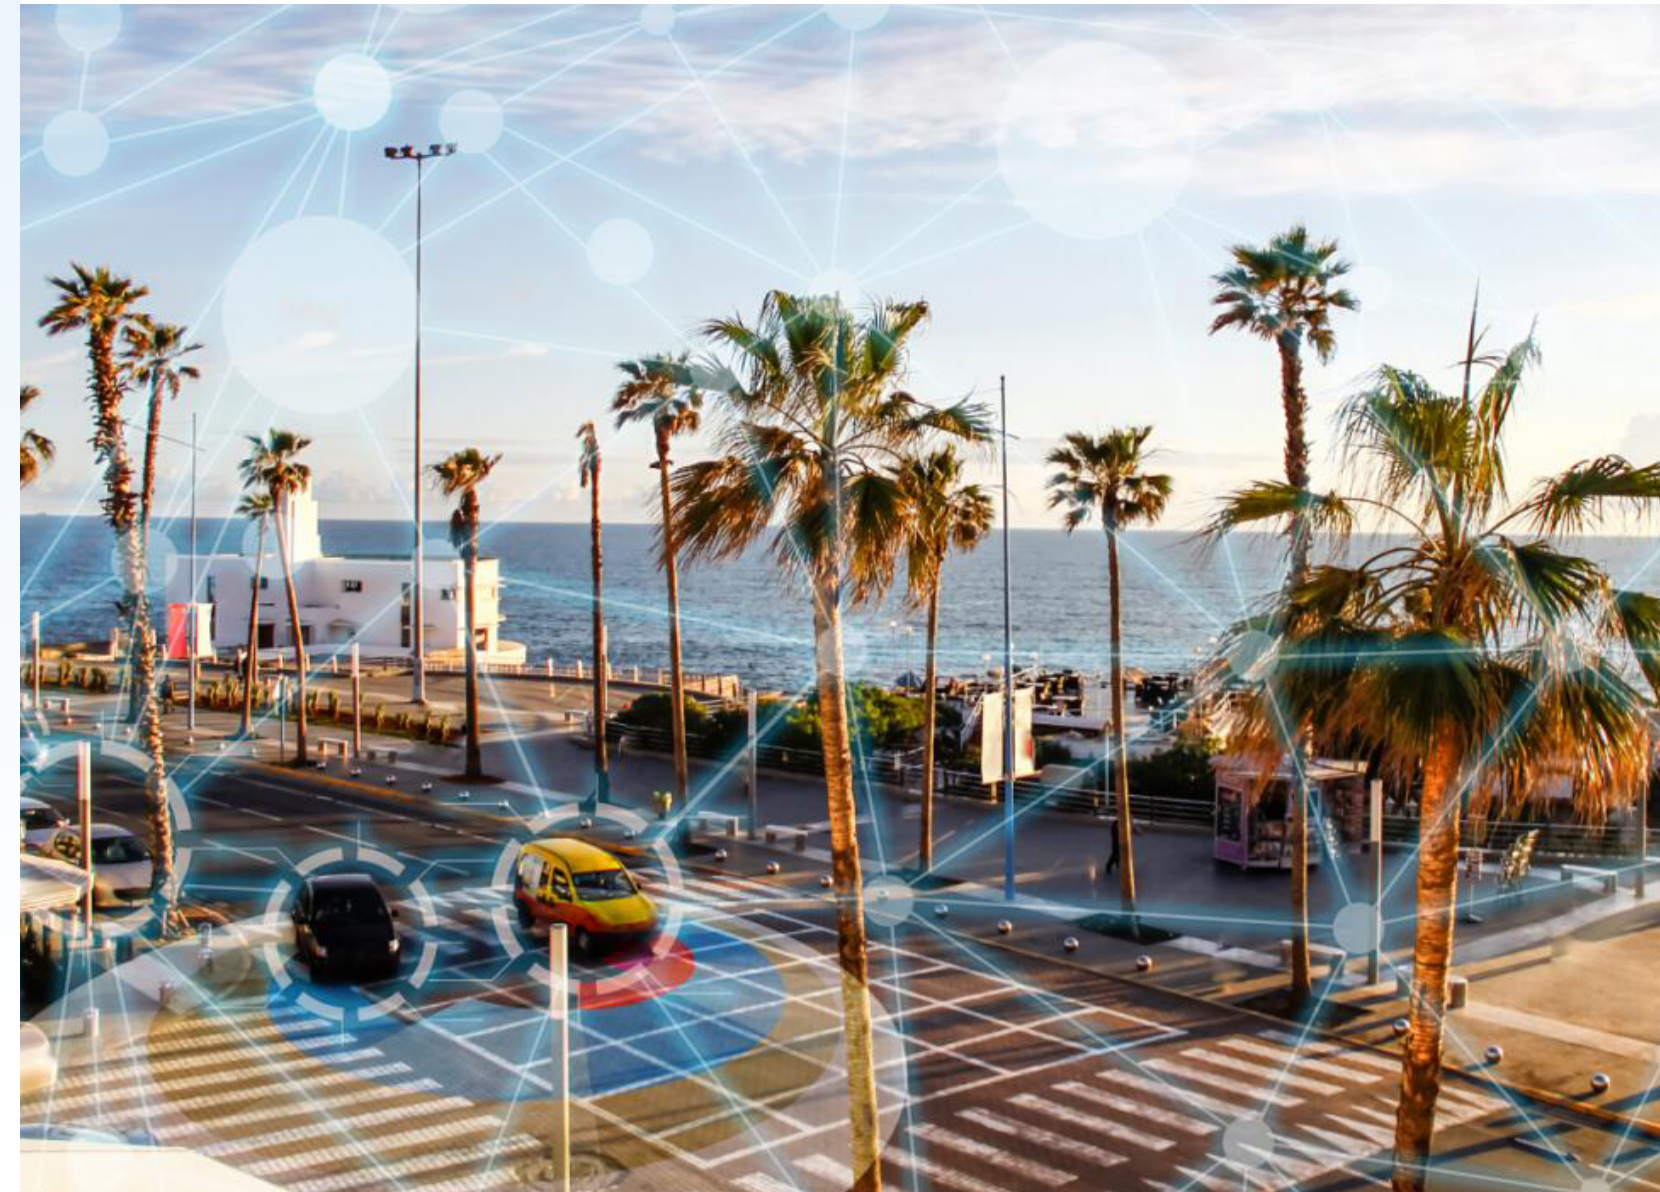

## Integrated Network Solutions for Intelligent Transportation

**3onedata Co., Ltd.**

Add: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Songbai Road, Nanshan District, Shenzhen, 518105, China

Tel: +86-755-26702688 Email: ics@3onedata.com

Copyright © 2020 3onedata Co., Ltd. All Rights Reserved.



Follow us on LinkedIn