



Typical Features

- ◆ Wide input voltage range: 85-305VAC/120-430VDC
- ◆ No load power consumption≤0.3W
- ◆ Transfer efficiency (typ. 81%)
- ◆ Switching Frequency:65KHz
- ◆ Protections: short circuit, over-current
- ◆ Isolation voltage:4000Vac
- ◆ Conform to IEC62368/UL62368/EN62368 test standard
- ♦ With CE, RoHS certificate
- ◆ Plastic case, meet UL94 V-0
- ◆ PCB mounting





Application Field

FA5-220SXXC2D4 Series----- a compact size, high efficient, pass CE standard power module offered by Aipu. It features universal input voltage range, DC and AC dual-use, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, safer isolation. with good EMC performance, meet international EN55032 IEC/EN61000 standard. This series have wide application for power, industrial, instrument, smart home field.

The application circuit in the datasheet is strongly recommended for harsh EMC environment.

Typical Product List							
Certificate	Part No	Output Specifications			Max.	Ripple&	Efficiency@
		Power	Voltage	Current	Capacitive Load	Noise	full load,
						20MHz (Max)	220Vac (typical)
		() ()	\/o(\/)	In/m A)		, ,	(typical)
		(W)	Vo(V)	lo(m A)	u F	mVp-p	70
CE/RoHS	FA5-220S3V3C2D4	3	3.3	1000	4000	100	67
CE/RoHS	FA5-220S05C2D4	5	5	1000	4000	100	72
CE/RoHS	FA5-220S09C2D4	5	9	556	1000	100	74
CE/RoHS	FA5-220S12C2D4	5	12	416	500	100	80
CE/RoHS	FA5-220S15C2D4	5	15	333	400	100	81
CE/RoHS	FA5-220S24C2D4	5	24	208	220	150	81

Note 1: Suffix" -T" for chassis, "-TS" din-rail mounting, rail width is 35mm;

Note 2:The typical value of output efficiency is based on full load and burn-in after half an hour.

Note 3: The fluctuation range of full load efficiency at table(%,TYP) is ±2%, full load efficiency = total output power/module's input power.

Note 4: Ripple & Noise is tested by twisted pair method, for details please see (Ripple& Noise Test) at back.

Note 5: For more items, please contact with our sales team.






Input Specifications						
ltem	Operating Condition	Min	Тур.	Max	Unit	
land Vallana Dana	AC input	85	220	305	VAC	
Input Voltage Range	DC input	120	310	430	VDC	
Input Frequency Range	-	47	50	63	Hz	
	115VAC	/	/	0.15		
Input Current	220VAC	/	/	0.1	A	
	115VAC	/	/	10		
Surge Current	220VAC	/	/	20		
Leakage Current	-		0.5mA TYP/230V	AC/50Hz		
External Fuse Recommended Value	-		1A-3A/250VAC sl	ow-fusing		
Hot-plug	-		unavailab	le		
Remote Control Terminal	-		unavailab	le		
Output Specifications						
Item	Operating Condition	Min	Тур.	Max	Unit	
Voltage Accuracy	Full input voltage range, any load	-	±2.0	±5.0	%	
Line Regulation	Nominal load	-	-	±2.0	%	
Load Regulation	Nominal input voltage 20%~100% load	-	-	±4.0	%	
Na Land Dawar Organization	Input 115VAC	-	-	0.0	NA/	
No Load Power Consumption	Input 220VAC	-	-	0.3	W	
Minimum Load	Single Output	0	-	-	%	
Start-up Delay Time	Nominal input voltage (full load)	-	1000	-	mS	
Dower off Holding Time	Input 115VAC (full load)		50			
Power-off Holding Time	Input 220VAC (full load)		100	-	- mS	
Dunamia Bassassas	25%~50%~25%	-5.0	-	+5.0	%	
Dynamic Response	50%~75%~50%	-5.0	-	+5.0	mS	
Output Overshoot	Full input voltage	≤10%Vo		%		
Short Circuit Protection	range	Con	tinuous, Self-recovery	1	Hiccup	
Temperature Coefficient	-	-	±0.03%	-	%/°C	
Over Current Protection Full input voltage range		≥120% lo self-recovery			Hiccup	






Item		Operating Condition	Min	Тур.	Max	Unit		
Switching Frequency -		-	65	-	KHz			
Ope	rating Tem	perature	-	-40	-	+75		
Sto	rage Temp	erature	-	-40	-	+85	\mathbb{C}	
Soldering Temperature			Wave-soldering	260±4℃, timing 5-10S				
		perature	Manual-soldering	360±8℃, timing 4-7S				
R	elative Hu	midity	-	10	-	90	%RH	
ls	Input-Output Isolation Voltage Test 1min, leakage current≤5mA		4000	-		VAC		
In	sulation R	ion Resistor Input-Output@DC500		100	-		ΜΩ	
Safety Standard		-	EN62368, IEC62368					
Vibration		n	-	10-55Hz,10G,30Min, along X,Y,Z				
Class of Case Material		Material	-	UL94 V-0				
MTBF		-	MIL-HDBK-217F@25℃>300,000H					
EMC C	Characte	ristics						
Total Item			Sub Item	Test Standard	Class			
			CE	CISPR22/EN55032	CLASS B (recommend circuit see photo1)			
	EMI		RE	CISPR22/EN55032	CLASS B (recommend circuit see photo1)		1)	
			RS	IEC/EN61000-4-3	10V/m Perf.Criteria B (recommend circuit see photo			
EMC EMS			CS	IEC/EN61000-4-6	3Vr.m.s Perf.Criteria B (recommend circuit see photo			
			ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV Perf.Criteria B			
	EMS	Surge		IEC/EN61000-4-5	line to line ±2KV / line to ground ±4KV Perf.Criteria B (see recommend circuit photo 1)			
			EFT	IEC/EN61000-4-4	±2KV Perf.Criteria B			
		Voltage dips, short interruptions and voltage variations immunity		IEC/EN61000-4-11	0%~70% Perf.Criteria B			




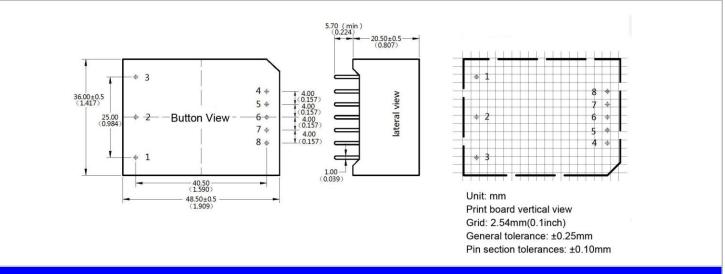

C2-T Dimension



C2-TS Dimension







Packing Code	LxWxH	
C2	48.5 x 36.0 x 20.5 mm	1.909 x 1.417 x 0.807inch
C2-T	96 x 53.8 x 29.5mm	3.780X2.118X1.161inch
C2-TS	96 x 53.8 x 34.5mm	3.780X2.118X1.358inch

Pin Definition


Pin	1	2	3	4	8
Single(S)	FG	AC(N)	AC(L)	+Vo	-Vo

Note: If the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.


Ripple& Noise Test: (Twisted Pair Method 20MHZ bandwidth)


Test Method:

- (1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.
- (2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.



Product Characteristic Curve

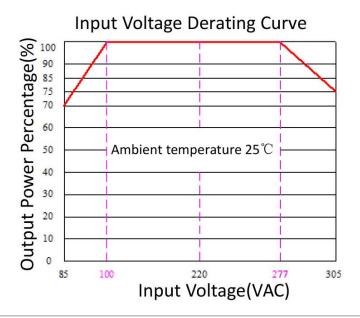

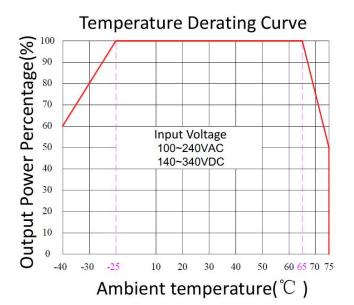

Note 1: Input Voltage should be derated based on input voltage derating curve when it is 85~100VAC/277~305VAC/120~140VDC/390~430VDC.


Note 2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.





Typical EMC Recommended Circuit:

Photo 1: EMC for high requested circuit

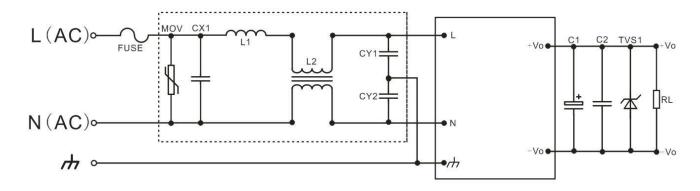

Component	Value		
FUSE	3.15A/250Vac, slow fusing, necessary		
MOV 14D471K			
CX1 0.22uF/275Vac			
L1 2.0uH/2.5A (I inductor)			
L2 Green ring 15mH/2.5A T12X7X6mm			
CY1/CY2	CY1/CY2 102M-400Vac		

Note:

- 1) C1 choose high frequency low impedance electrolytic capacitor, the capacitance value less than capacitive load, withstand voltage is 1.5 times more than output voltage;
- 2) C2 choose 0.1uF ceramic chip capacitor, withstand voltage is 1.5 times more than output voltage;
- 3) TVS1 is TVS tube; 5V output recommend:SMBJ7.0A, 9V output recommend:SMBJ12.0A, 12V output recommend:SMBJ20A, 15V output recommend:SMBJ20.0A, 24V output recommend:SMBJ30.0A, 48V output recommend:SMBJ64A.

Note:

- 1. The product should be used within the specification range, or it will cause permanent damage to it;
- 2. The input terminal should connect to fuse;
- 3. If the product is operated under the minimum load, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- 4. If the product is worked beyond the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- 5. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25 °C, humidity<75% with nominal input voltage and rated output load(pure resistance load);
- 6. All index testing methods in this datasheet are based on our Company's corporate standards;
- 7. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
- 8. We can provide product customization service,
- 9. Specifications are subject to change without prior notice.