



## **Typical Features**

- ◆ Wide input voltage range: 85-305VAC/120-430VDC
- ◆ No load power consumption ≤ 0.2W
- ◆ Transfer Efficiency 82%(TYP.)
- ◆ Switching Frequency: 65KHz
- ◆ Protections: short circuit, over current
- ◆ Isolation voltage: 3600Vac
- ◆ Meet IEC62368/UL62368/EN62368 test standard
- ◆ Ultra-small package for bare board, industrial design
- PCB mounting



# **Application Field**

DA10-220SXXG9D4 Series---- a compact size, high efficient power module offered by Aipu. It features universal input voltage range, AC and DC dual-use, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, safer isolation, good EMC performance. EMC and Safety standard meet international EN55032 ,IEC/EN61000. These series have important application for power, industry, instrument and smart home field. For harsh EMC environment, the application circuit in the datasheet is strongly recommended.

Typic	al Product List						
Certi			Output Specificatio	ns	Max. Capacitive	Noise Full Lo 20MHz 220V (Max) (Typic	Efficiency@ Full Load,
ficat e	Part No.	Power	Voltage	Current	Load		220Vac (Typical)
		(W)	Vo(V)	Io(m A)	u F	mVp-p	%
-	*DA10-220S3V3G9D4	6.6	3.3	2000	5000	100	75
-	DA10-220S05G9D4	10	5	2000	5000	100	80
-	*DA10-220S12G9D4	10	12	833	3000	120	81
-	*DA10-220S15G9D4	10	15	667	3000	120	81
-	*DA10-220S24G9D4	10	24	416	2000	150	82

Note 1: Due to space limitations, above is only a part of our product list, please contact our sales team for more items.

Note 2: The typical value of output efficiency is based on module is full loaded and burned-in after half an hour.

Note 3: "\*" are models being developing.

Note 4: The fluctuation range of full load efficiency(%,TYP) in table is ±2%, full load efficiency= output power/module's input power.

Note 5: Ripple & Noise is tested by twisted pair method, details please refer to Ripple & Noise test at back.







Input Spec	ifications							
	ltem	Operating Condition	n	Min	Тур.	Max	Unit	
		AC input		85	220	305	VAC	
input vo	ltage Range	DC input		120	310	430	VDC	
Input Fre	quency range	-		47	50	63	Hz	
lnnu	t Current	115VAC		/	1	0.20		
Шра	Current	220VAC 115VAC 220VAC		/	/	0.10	A	
Sura	e Current			1	/	10		
Guig	e ourrein			1	/	20		
Leaka	ge Current	-			0.25mA TYP	2/230VAC/50Hz		
	ed External Input Fuse	-			1A-3A/250V	AC slow fusing		
Но	ot Plug	-		Unavailable				
Remote C	ontrol Terminal	-			Unavailable			
Output Spe	ecifications							
ا	Item	Operating Condition		Min	Тур.	Max	Unit	
Voltage	e Accuracy	Input voltage 220V, any load Vo1		-	±2.0	±4.0	%	
Line F	Regulation	Nominal load Vo1		-	±0.5	±1.0	%	
Load I	Regulation	Nominal input voltage, 20%~100% load		-	±1.0	±3.0	%	
Nolood	Consumption	Input 115VAC		-	- 0.1		W	
NO LOAG	Consumption	Input 220VAC		-	-	- 0.1		
Minim	num Load	Single Output		0	-	-	%	
Start up	Delay Time	Nominal input voltage (fu	ll load)	-	1000	-	mS	
Dower off	Lolding Time	Input 115VAC (full load)			50		c	
Fower-on	Holding Time	Input 220VAC (full load)		-	80	-	mS	
Dynamic	Overshoot range	25%~50%~25%		-5.0	-	+5.0	%	
Response	Recovery time	50%~75%~50%		-5.0	-	+5.0	mS	
Output	Overshoot	Full input valtage	~~		≤10%Vo		%	
Short circ	cuit Protection	Full input voltage ran	ye 	Con	tinuous, self-red	covery	Hiccup	
Tempe	rature Drift	-		-	- ±0.03% -		%/°C	
Over Curr	ent Protection	Input 220VAC		≥1:	20% lo, self-rec	overy	Hiccup	





eneral Specifications						
ltem	Operating Condition	Min	Тур.	Max	Unit	
Switching Frequency	-	-	65	-	KHz	
Operating Temperature	-	-40	-	+85	9,5	
Storage Temperature	Storage Temperature -		-	+105	_ ℃	
0.11 : T	Wave soldering	260±4°C, time 5-10S				
Soldering Temperature	Manual soldering	360±8°C, time 4-7S				
Relative Humidity	-	10	-	90	%RI	
Isolation Voltage	Input-Output, Test 1min, leakage current≤5mA	3600	-	-	VAC	
Insulation Resistance	Input-Output@ DC500V	100		-	ΜΩ	
Safety Standard	-	EN60950、IEC60950				
Vibration	-	10-55Hz,10G,30Min,alongX,Y,Z				
Safety Standard	-	CLASSII				
MTBF	-	MIL-HDBK-217F@25°C>300,000H				


	Total Item	Sub Item	<b>Test Standard</b>	Class
	EM	CE	CISPR22/EN55032	CLASS B (See Recommended Circuit on photo 2)
	ЕМІ	RE	CISPR22/EN55032	CLASS B (See Recommended Circuit on photo 2)
		RS	IEC/EN61000-4-3	10V/m Perf.Criteria B (See Recommended Circuit on photo 1)
EM		CS	IEC/EN61000-4-6	3Vr.m.s Perf.Criteria B (See Recommended Circuit on photo 1)
С		ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV Perf.Criteria B
	EMS	Surge	IEC/EN61000-4-5	±1KV Perf.Criteria B
		EFT	IEC/EN61000-4-4	±2KV Perf.Criteria B
		Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%~70% Perf.Criteria B


**Dimension** 








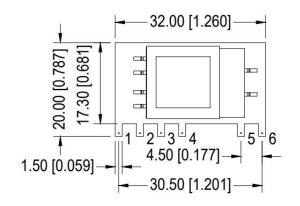

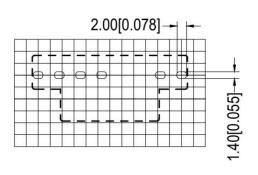



Note:
Grid 2.54\*2.54mm
Unit:mm[inch]
Pin tolerance:±0.10mm[±0.00439nch]
layout is for reference, please refer to actual item

Packing Code	LxWxH			
-	32.0 x 20.0x 10.5 mm	1.260 × 0.787 × 0.413 inch		


#### **Pin Specification**

Pin	1	2	3	4	5	6
Single(S)	AC(N)	AC(L)	+Vc	-Vc	-Vo	+Vo


## Ripple& Noise Test: (Twisted Pair Method 20MHZ bandwidth)


#### Test Method:

- (1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.
- (2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

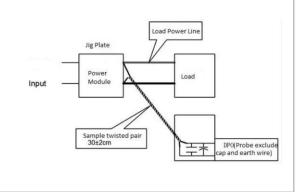

## **Product Characteristic Curve**

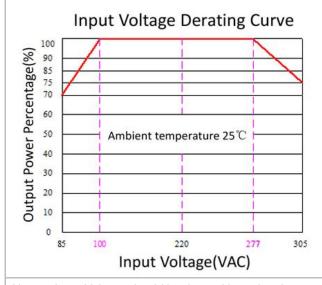

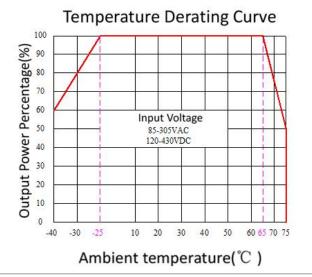


Note 1: Input Voltage should be derated based on Input voltage derating curve when it is 85~100VAC/277~305VAC/120~140VDC/390~430VDC

Note 2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.

# **Typical Application Circuit and EMC Recommended Circuit**

## 1. Typical Application Circuit

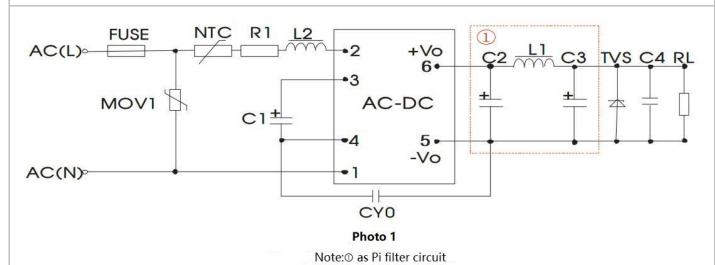

Products Number	C1 (Nece ssary)	C2 (Necessary to connect the external solid-state capacitor)	L1 (Nece ssary)	C3 (Necessary to connect the external solid-state capacitor)	C4	L2	NTC	CY0	FUSE (Neces sary)	TVS Tube
DA10-220S3V3G9D4		220uF/10V		220uF/10V						SMBJ7.0A
DA10-220S05G9D4	005	220uF/10V		220uF/10V	0.4::5/	4.7		40484	0.4547	SMBJ7.0A
DA10-220S12G9D4	22uF /450V	220uF/16V	2.0uH	220uF/16V	0.1uF/ 50V	4.7m H	5D-9	104M/ 400V	3.15A/ 250V	SMBJ20A
DA10-220S15G9D4	/45UV	220uF/16V		100uF/16V	500			4000	4000 2500	SMBJ20A
DA10-220S24G9D4		100uF/35V		47uF/35V						SMBJ30A







#### Note:

- 1) C1: AC input, C1 is input filter electrolytic capacitor (necessary), recommended value is 10uF/450V; DC input, C1 is big filter capacitor in the EMC filter (necessary), recommended value is 10uF/450V;
- 2) R1 is limited resistor, recommended value is  $12\Omega$ , 5W;
- 3) MOV1 is piezoresistor, recommended model is 10D561K;

# 2. EMC recommended circuit (Used Under high EMC requirement)

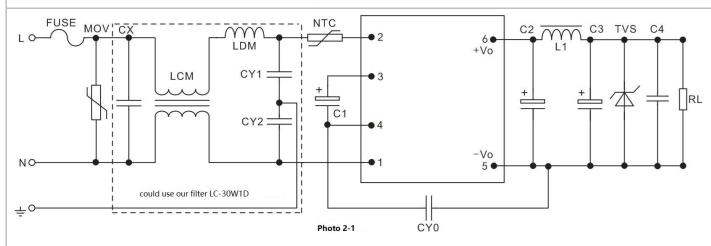

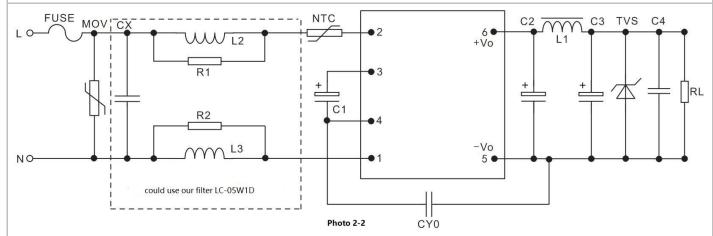

Component	Recommend 3.15A, 250V (Necessary)	NTC	5D-9	R1, R2	Resistor 2.2K, above 1/8W
MOV	10D561K	CY1, CY2	1nF/400VAC		
СХ	Recommended 0.22uF/275Vac	LDM	330uH		
LCM	40mH min	L2, L3	Color ring inductor		
LOW	10.111.1111111		1mH, 1W		





Note 1:
1. The product should be used within the specification range, or it will cause permanent damage to it;
2. The input terminal should connect to fuse;

- 3. If the product is worked under the minimum requested load, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- 4. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- 5. Unless otherwise specified, parameters in this datasheet were measured under the conditions of **Ta=25°C**, **humidity<75%** with nominal input voltage and rated output load(pure resistance load);
- 6. All index testing methods in this datasheet are based on our Company's corporate standards;
- 7. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
- 8. We can provide product customization service,
- 9. Specifications are subject to change without prior notice, please follow up with our website for newest manual.